# NAS NVRmini Linux Embedded Standalone

## Support Megapixel and H.264 cameras































Key Benefit

### Stability and Reliability

NVRmini is a linux-embedded system that is free from virus attack. With its server-client architecture, NVRmini provides a most stable and high quality monitoring and recording performance. Not only does its software offer a top quality performance, but the hardware enhances stability as well by supporting 4 RAID levels, smart fan, HDD SMART, auto power on, UPS and much more.

### Easy to Use

A top user-friendly system should combine fast and flexible configuration with easy operation. With a few simple steps for installation, the web-based management leads users to configure, monitor and playback video everywhere. UPnP search, auto camera detection and GUI schedule save setting-up time, while the easy drag and drop camera, auto scan, preset point patrolling, and multiple views offer users a prime monitoring experience.

### Value-added Surveillance Features

There are some outstanding features included in the NVRmini, one of which is mobile phone client. Users can check their live video wherever they want through iPhone, iPad, Android, Windows Phone 7, or BlackBerry. Another feature is Point of Sale (POS). POS data is displayed on live screen of designated channels, and users can fast search POS transaction and related video records. Still another NVRmini feature is the digital watermark on exported video and snapshots, which prevents data from tampered without awareness.

### **Key Features**

- Server-client architecture
- Easy installation only 4 steps
- Support iPhone, iPad, Android,
  Windows Phone 7, BlackBerry
  mobile clients
- Web-based live viewer/ playback
- Online GUI recording schedule
- Up to 2/4 SATA HDD bays
- RAID 0,1,5,5+spare,10
- Support D1, real-time recording
- Support audio
- Real-time digital output and email
- Up to 128 CH remote liveview
- Playback with 5 intelligent search
- Support Point of Sale (POS)
- Support digital watermark
- Supported by NUUO Central Management System



### Web-Based Liveview



### **Point of Sale (POS)**

POS text overlay on live view video and



- Web-based management (Recommend on IE7 and later)
- Up to 128 CH remote live display on multiple
- Easy drag-and-drop camera on screen
- Camera PTZ integration
- Digital PTZ
- Auto scan
- Multiple views
- Preset point set, go and patrolling
- Support joystick
- System event popup
- Camera event on screen display and sound notification

### Intelligent Playback =



- Open record by time, graphic record, event log
- Multi-channel playback
- Playback system with 5 intelligent search
- Video enhancement
- POS search
- Support digital watermark on exported video or snapshot
- Evidence Export
- Auto backup video to FTP



## intelligent search

## 00




Multiple Language Support

English, Japanese, Traditional Chinese, Spanish, Deutsch, Finnish, French, Hungarian, Italian, Russian, Czech, Korean, Polish, Dutch, Serbian, Swedish, Portuguese (Brazil)

brightness, contrast or even grey scale.

### Server-Client Architecture

- Linux Embedded Free from PC crash and virus attack
- RAID 0,1,5,5+spare and 10, prevention of data loss
- Online GUI recording schedule
- Recording without PC turning on
- Support Megapixel Camera and H.264 Compression Format
- Support D1, real-time recording
- Support audio recording
- Camera I/O integration
- Real-time digital output, email and NUUO CMS alert
- Four kinds of user authorities: administrator, power user, user, and guest
- Log System
- Support Point of Sale (POS)

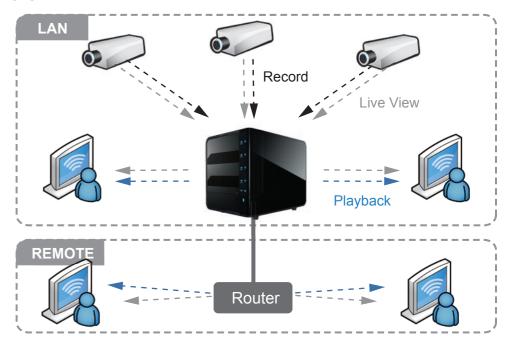



#### Server-Client Architecture

Centralizes all video data transaction only via NVRmini to remote clients, thus ensure good recording quality even with maximum of remote client



Embedded Linux for high stability and free from virus attack



Easy Installation Only 4 step Plug and Play



Web-Based Live Viewer

Users can login anytime anywhere via Internet Explorer and can login via four different user groups administrator, power user, user, and



Ultimate central monitoring solution for grand scale projects and projects with multiple sites.



iPhone, iPad, Android, Windows Phone 7 and BlackBerry.



### Intelligent Search

Search recorded video for 5 events including general motion, foreign object, missing object, loss focus and camera occlusion.



RAID 0,1,5,5+spare,10 Support RAID 0,1,5,5+ spare and 10 for maximum capacity or data



PTZ Control

Software enables digital PTZ function. Physical PTZ control and preset/go functions are also



### 128CH Remote Live View

Monitor multiple NUUO servers (NVR, DVR, NDVR and NVRmini) simultaneously in one single




#### Email Alert

system event through sound, digital output, E-mail and NUUO CMS alert.



Point of Sale (POS)

recorded POS transactions are searchable in the NVRmini

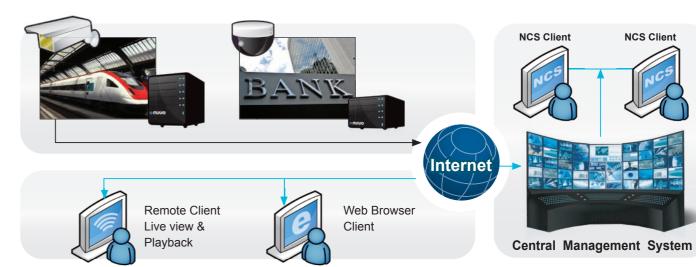




### **Specification**

Model	NV-2020	NV-2040	NV-4080S	NV-4160S
Recording Camera	1-2	1-4	1-8	1-16
Number of Drives	2xSATA II	2xSATA II	4xSATA II	4xSATA II
Available Drive Bays (US only)	1 ~ 4TB	1 ~ 4TB	1 ~ 8TB	1 ~ 8TB
RAID Level	RAID 0,1	RAID 0,1	RAID 0, 1, 5, 5+Spare, 10	RAID 0, 1, 5, 5+Spare, 10
I/O Interface	1xUSB 2.0 (for UPS)	1xUSB 2.0 (for UPS)	2xUSB 2.0 (for UPS),	2xUSB 2.0 (for UPS),
			1xeSATA (for DAS)	1xeSATA (for DAS)
LAN Transmission Speed	10/100/1000 Mbps (RJ45)	10/100/1000 Mbps (RJ45)	10/100/1000 Mbps (RJ45)	10/100/1000 Mbps (RJ45)
Dimension	92.0 x 145.2 x 213.2 mm	92.0 x 145.2 x 213.2 mm	188.5 x 152.5 x 227.6 mm	188.5 x 152.5 x 227.6 mm
Temperature	Operating: 5°C ~ 35°C			
Humidity	Operating: 10%-85%			
Compression Format	MPEG4, M-JPEG, H264, MxPEG (Depends on IP camera)			
	Camera dependent	Camera dependent	Camera dependent	Camera dependent
Recording Performance	Total bitrate: 20Mbps	Total bitrate: 20Mbps	Total bitrate: 65Mbps	Total bitrate: 55Mbps
	(Around 60fps at 1.3M)	(Around 60fps at 1.3M)	(Around 240fps at 1.3M)	(Around 160fps at 1.3M)
Remote PC CPU	Intel Core 2 Duo, 2.6 GHz			
Remote PC RAM	1 GB			
User Interface	HTTP web browser – Internet Explorer 7 and later / NUUO client application program			
Recording Type	Continuous record, record by schedule, manual record, event trigger record, digital input trigger record			
Remote Live View Control	Live view, preset/ go, PTZ, remote I/O, snapshot, multi-view, digital PTZ, advanced E-map, bandwidth monitoring			
Audio & Video Recording	Audio & video recording in synchronization			
POS	Live view, record, playback, and search for every transaction			
Auto Backup	Automatically backup the recorded video of the previous date to FTP			
Smart Search	General motion, missing object, foreign object, lose focus, camera occlusion			
Remote Client OS Platform	Windows XP (32-bit) / Vista (32-bit) / 7 (32 and 64-bit)			
Remote Live View Connections	Live view maximum 16 connections at the same time			
Mobile Client OS Platform	iPhone, iPad, Android, BlackBerry			
D D 10 :				

IP Camera Brand Support

ACTi, ArecontVision, ARM, Axis, Basler, Brickcom, Bosch, Cisco, CNB, D-Link, Dynacolor, Eneo, Fine, HIKVision, Honeywell, IQinVision, LevelOne, Lumenera, Linksys, Mobotix, Onvif, Panasonic, PiXORD, Samsung, Santec, SANYO, Sony, StarDot, Toshiba, Truen, Videosec, VIVOTEK, Zavio,

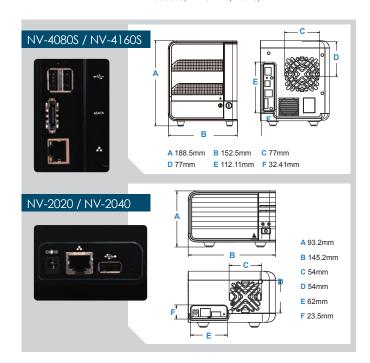

# Support 33 brands of IP cameras and 900 models



### **About NUUO**

NUUO is the world's leading provider of open platform video management solutions. Combining IP and analog technologies with IVS detections, NUUO guarantees a comprehensive security and surveillance solution to meet your high standard demands. Simple to install and manage, with customer-proven reliability, a high compatibility for 3rd party system integration and a wide range of IP camera support solutions in more than 20,000 worldwide installations, NUUO is dedicated to providing a flexible, user-friendly surveillance solution for large-scale and high-level enterprise projects as well as for small-and-medium business.